

# LIFT & TILTS

# SELF PROPELLED LIFT TABLE

2,000 / 3,000 / 4,000 / 5,000 / 6,000 LBS

**AVOID BACK STRAIN AND INJURY**

**ELIMINATE UNNECESSARY STRAIN ON THE OPERATOR BY ADJUSTING THE LIFT TO A COMFORTABLE WORKING HEIGHT**

**DESIGNED TO HANDLE HEAVY DUTY LIFTING AND POSITIONING APPLICATIONS**

**IDEAL FOR DIE APPLICATIONS**

**WIDE BASE UNITS ARE DESIGNED FOR WIDER PLATFORMS AND GREATER SIDE LOAD SUPPORT**

**CAPACITY**

• 2,000/3,000/4,000/5,000/6,000 lbs.

**PLATFORM SIZES**

• 24" wide x 36" long to 60" wide x 96" long

**BASE SIZES**

• Standard 24, 36" wide x 36", 48", 60", 72" long

**TRAVEL**

• 24", 36", 42", 48" vertical travel

**LOWERED HEIGHT OF LIFT TABLE**

• 12"

**SAFETY**

- Velocity fuse is standard on each cylinder
- Heavy duty hydraulic cylinders - chrome plated rod with polyurethane seals
- Horn in control head

**MAINTENANCE**

- Hinged table top provides easy access to power unit and cylinders
- Self lubricated bronze bushings on all wear points
- Easy removeable cover

**LIFT TABLE OPTIONS**

- Oversized platforms
- Rotating tops - spring detents - manual detents
- Roller conveyor, Ball transfer tops
- Bellow safety skirting
- Safety tape switch
- Safety touch bars

For more information on any of our products, please contact:



www.mh-partners.com

**OPTIONS • APPLICATIONS**


**SIDE LOADING POWERED LIFT TABLE**



**DIE CHANGING UNIT with Bellow Safety Skirting**



**DIE CHANGING UNIT with Rollers**

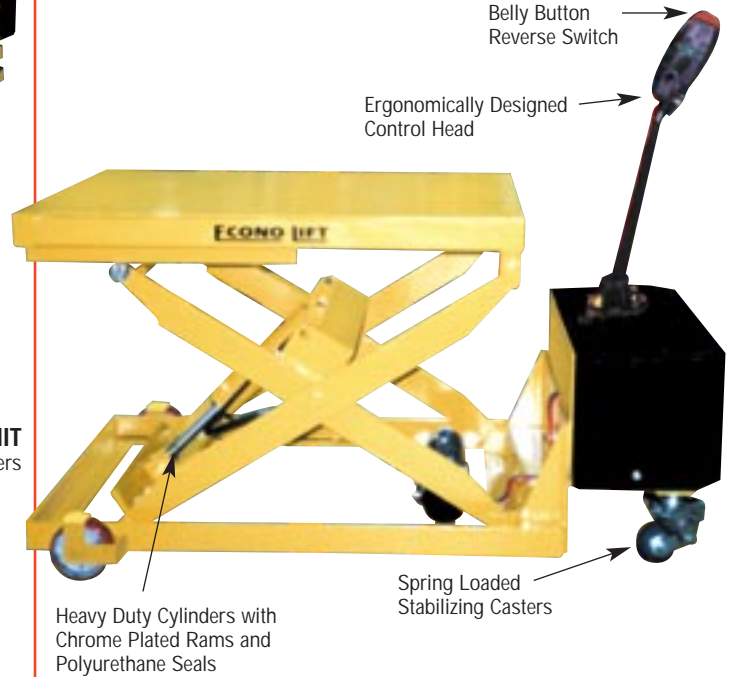

**SPECIFICATIONS**

**STANDARD 24" WIDE BASE LIFT TABLES**

MODEL NO.	CAPACITY (LBS.)	STD. PLAT. BASE (W X L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (IN.)	RAISED HT (IN.)	UP SPEED (SEC.)	SHIP WEIGHT (LBS)
<b>24" TRAVEL - 24" WIDE x 36" LONG PLATFORM/BASE</b>							
PLT24-20	2,000	24 x 36	48 x 60	12	36	15	600
PLT24-40	4,000	24 x 36	48 x 60	12	36	21	620
PLT24-60	6,000	24 x 36	48 x 60	12	36	32	670
<b>36" TRAVEL - 24" WIDE x 48" LONG PLATFORM/BASE</b>							
PLT36-20	2,000	24 x 48	48 x 72	12	48	17	750
PLT36-30	3,000	24 x 48	48 x 72	12	48	30	770
PLT36-40	4,000	24 x 48	48 x 72	12	48	37	800
PLT36-50	5,000	24 x 48	48 x 72	12	48	42	830
PLT36-60	6,000	24 x 48	48 x 72	12	48	45	850
<b>48" TRAVEL - 24" WIDE x 72" LONG PLATFORM/BASE</b>							
PLT48-20	2,000	24 x 72	48 x 96	12	60	32	1000
PLT48-40	4,000	24 x 72	48 x 96	12	60	48	1150
PLT48-60	6,000	24 x 72	48 x 96	12	60	54	1200

**WIDE BASED UNITS** for wider platform applications and greater stability.

**36" WIDE BASE LIFT TABLES**

MODEL NO.	CAPACITY (LBS.)	STD. PLAT. BASE (W X L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (IN.)	RAISED HT (IN.)	UP SPEED (SEC.)	SHIP WEIGHT (LBS)
<b>24" TRAVEL - 36" WIDE x 36" LONG PLATFORM/BASE</b>							
3PLT24-20	2,000	36 x 36	60 x 60	12	36	15	680
3PLT24-40	4,000	36 x 36	60 x 60	12	36	21	720
3PLT24-60	6,000	36 x 36	60 x 60	12	36	32	750
<b>36" TRAVEL - 36" WIDE x 48" LONG PLATFORM/BASE</b>							
3PLT36-20	2,000	36 x 48	60 x 72	12	48	17	950
3PLT36-40	4,000	36 x 48	60 x 72	12	48	30	990
3PLT36-60	6,000	36 x 48	60 x 72	12	48	37	1050
<b>48" TRAVEL - 36" WIDE x 72" LONG PLATFORM/BASE</b>							
3PLT48-20	2,000	36 x 72	60 x 96	12	60	32	1300
3PLT48-40	4,000	36 x 72	60 x 96	12	60	48	1400
3PLT48-60	6,000	36 x 72	60 x 96	12	60	54	1480

For special capacities or sizes please consult factory. Specifications subject to change without notice.

**DRIVE UNIT/ELECTRICS**

- 24 volt system
- Variable speed control - forward/reverse
- Built in 24 volt charger

**CONTROL HEAD**

- Butterfly switches for forward and reverse
- Push buttons for raising and lowering of forks
- Built in horn

**BRAKES**

- Engaged in upper thru lower position of the steering column when power is turned off
- Electro-mechanical brake system

**STEERING**

- 180 degree turning radius
- Handle ergonomically designed

**POWER SUPPLIES**

- D/C Battery
- 24 volt push button

**OPTIONS**

- Longer Forks
- Industrial battery
- Industrial charger
- Battery discharge indicator
- Hour meter

# LIFT & TILTS

## SELF PROPELLED PORTABLE SKID LIFT

1,500 / 3,000 LBS

**ELIMINATE DOWN TIME BY ALLOWING OPERATORS TO BE INDEPENDANT OF A FORK LIFT**

**MOVE SKIDS AND METAL CONTAINERS WITH EASE**

**IDEAL FOR LOADING PRESSES WITH SHEETS OF PRODUCT**

**DRIVE UNIT/ELECTRICS**

- 24 volt system
- Variable speed control - forward/reverse
- Built in 24 volt charger

**CONTROL HEAD**

- Butterfly switches for forward and reverse
- Push buttons for raising and lowering of forks
- Built in horn

**BRAKES**

- Engaged in upper thru lower position of the steering column when power is turned off
- Electro-mechanical brake system

**STEERING**



- 180 degree turning radius
- Handle ergonomically designed

**POWER SUPPLIES**

- D/C Battery
- 24 volt push button

**OPTIONS**

- Longer Forks
- Industrial battery
- Industrial charger
- Battery discharge indicator
- Hour meter

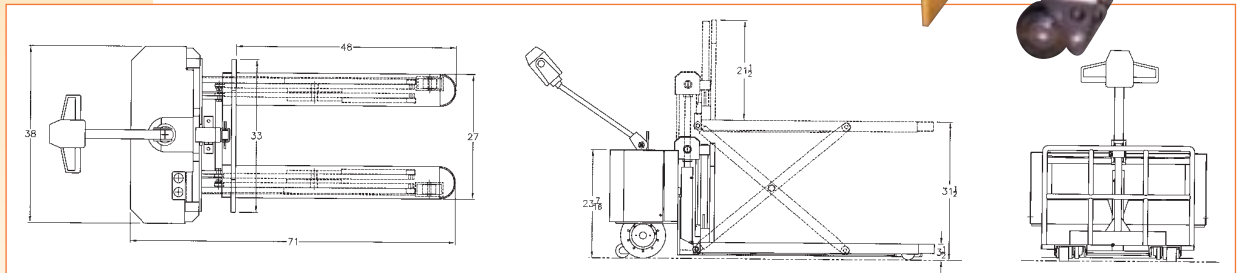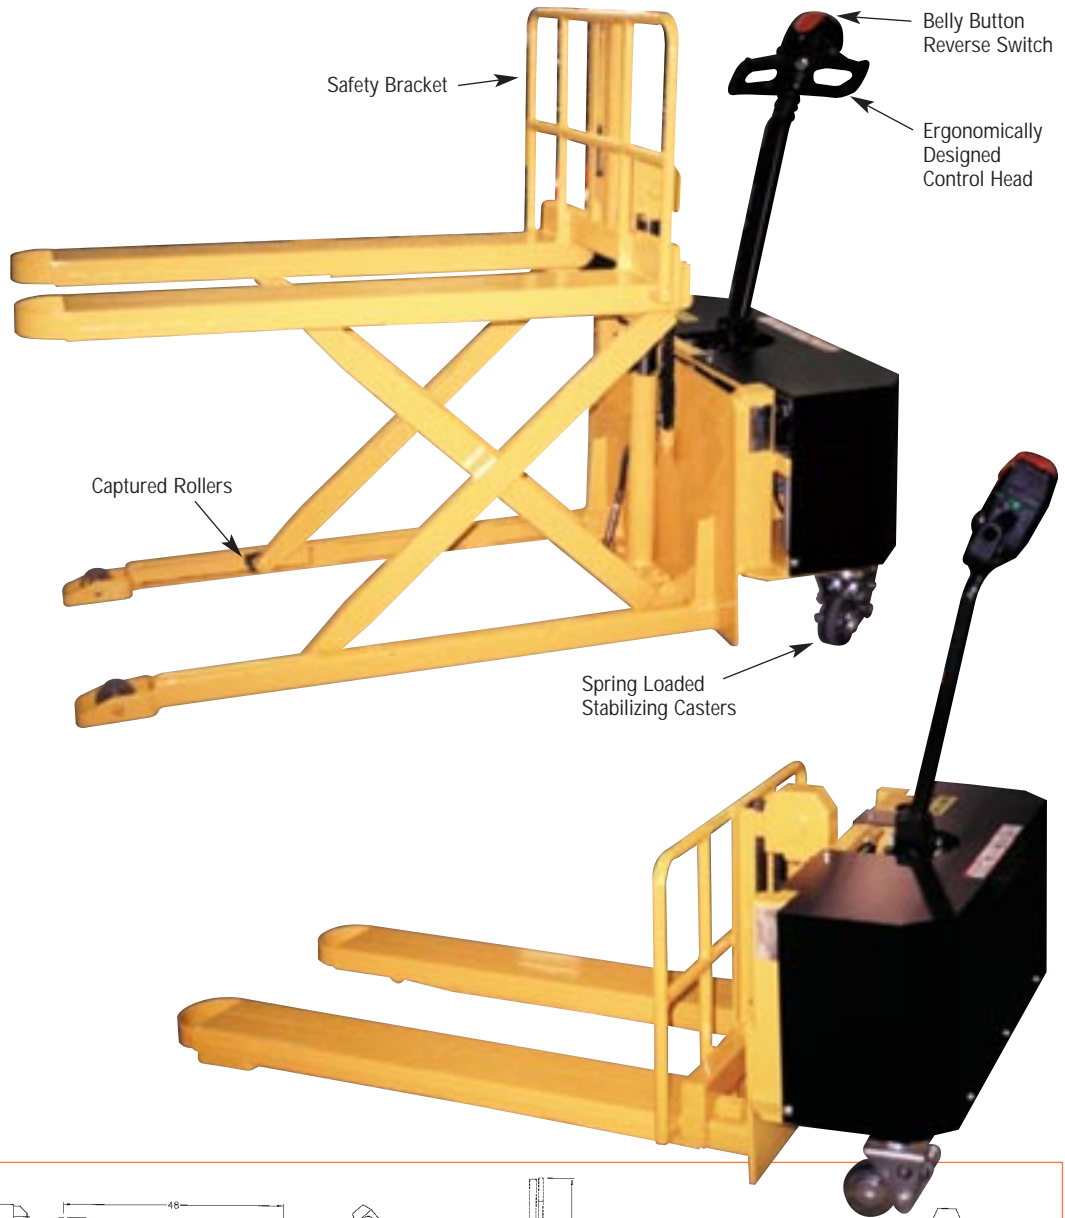

MODEL NO.	CAPACITY (LBS.)	FORK DIMENSIONS (W X L) (IN.)	FORK HEIGHTS (IN.)		WEIGHT (LBS.)
			LOWERED	RAISED	
PPSL-15B	1,500	27 x 48	3.5	31.5	600
PPSL-30B	3,000	27 x 48	3.5	31.5	800

For more information on any of our products, please contact:



www.mh-partners.com

For special capacities or sizes please consult factory. Specifications subject to change without notice.

**TILTING • DUMPING • LIFTING • TURNING**

Nationwide Sales by Indoff visit us at [www.diehandling.com](http://www.diehandling.com) click-here

CAT # PPSL 02

